


E-Z Kraft[®] Softwood Pulp

	CSF	Beater Time	Bulk	Burst	Tear	Tensile	Fold
	mLs	mins.	cc/g	factor	factor	meters	count
	748	0	1.94	14	207	2659	17
	600	30	1.63	63	163	8200	1890
	500	40	1.59	68	147	9000	2340
	400	48	1.55	72	138	9400	2660
	300	56	1.53	73	133	10000	2890
Standard Method		TAPPI T200 & T227		TAPPI T403	TAPPI T414	TAPPI T494	TAPPI T511

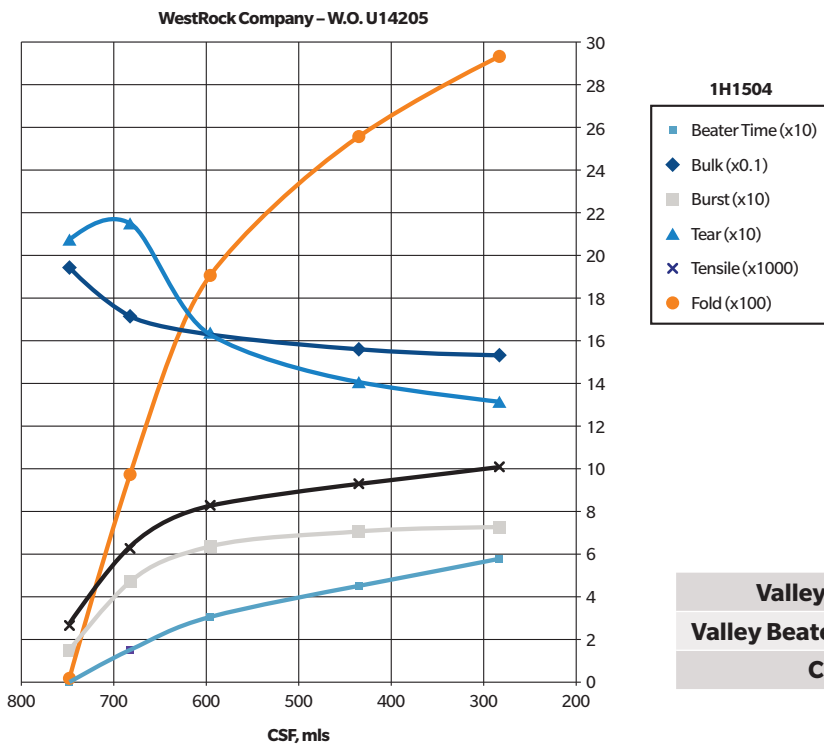

Softwood kraft - Principally species of hard pine, morphological characteristics, coarseness, etc., similar to southern yellow pine.

Valley Beater Method:	TAPPI
Valley Beater, o.d. charge, grams:	360
Calculations:	Oven-dried


E-Z Kraft[®] Softwood Pulp is produced at our Demopolis mill in Demopolis, AL.

All WestRock mills are certified to the SFI[®], PEFC[®], and FSC[®] Chain of Custody Standards.

Certificates Codes: SFI Certified Sourcing: NSF-SFILUFS-6S751, SFI CoC: NSF-SFICOC-6S751, PEFC: NSF-PEFCCOC-6S751; FSC Company Code: FSC-C104002.

E-Z Kraft[®] Softwood Pulp

	CSF	PFI	Bulk	Burst	Tear	Tensile	Fold
	mLs	revs	cc/g	factor	factor	meters	count
	724	0	1.90	17	226	3053	29
	600	3600	1.59	68	159	8500	1900
	500	5700	1.55	73	151	9300	2350
	400	8000	1.52	74	148	9600	2630
	300	10300	1.49	76	146	9800	2850
Standard Method				TAPPI T403	TAPPI T414	TAPPI T494	TAPPI T511

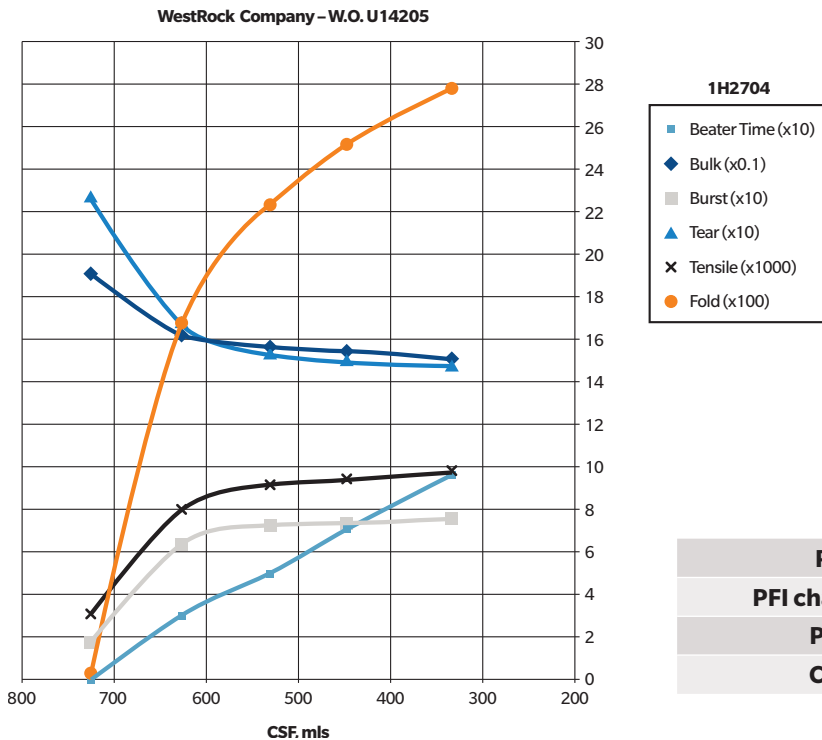

Softwood kraft - Principally species of hard pine, morphological characteristics, coarseness, etc., similar to southern yellow pine.

PFI Method:	TAPPI
PFI charge, o.d. grams:	24.0
PFI gap, mm:	0.2
Calculations:	Oven-dried

E-Z Kraft[®] Softwood Pulp is produced at our Demopolis mill in Demopolis, AL.

All WestRock mills are certified to the SFI[®], PEFC[®], and FSC[®] Chain of Custody Standards.

Certificates Codes: SFI Certified Sourcing: NSF-SFILUFS-6S751, SFI CoC: NSF-SFICOC-6S751, PEFC: NSF-PEFCCOC-6S751; FSC Company Code: FSC-C104002.

E-Z Kraft® Hardwood Blend Pulp

Typical Physical Properties					Standard Method
Property	Typical Values				
Composition	80% Hardwood; 20% Softwood Furnish				
Brightness (%)	86 (minimum 84)				ISO 2470
Lot Average Moisture (%)	87 (range 80-90)				
Dirt Content, Tappi T 213	< 2 ppm				
	Canadian Standard Freeness				
	500	400	300	200	
Burst	38	45	51	54	TAPPI T403
Breaking Length	6.1	7.1	8.1	8.8	TAPPI T494
Fold	155	365	862	1207	TAPPI T511
Tear	130	123	115	111	TAPPI T414
Beating Time	21.2	28.5	36.8	42	TAPPI T200 & T227

The information provided here identifies the target value for each product. The actual value of the characteristics may vary slightly from one run to another. This information is subject to change without notice.

Typical Product Packaging

Bale Dimensions: Metric = TBD. English = 31 5/8" Width, 30 1/4" Length, 16-18" high, 540 lbs/bale.
 Wrapped customer order bales.

E-Z Kraft® Hardwood Blend Pulp is produced at our Demopolis mill in Demopolis, AL.

All WestRock mills are certified to the SFI®, PEFC®, and FSC® Chain of Custody Standards.

Certificates Codes: SFI Certified Sourcing: NSF-SFILUFS-6S751, SFI CoC: NSF-SFICOC-6S751, PEFC: NSF-PEFCCOC-6S751; FSC Company Code: FSC-C104002.

